

SPECIFICATIONS:


ELECTRICAL

Center Frequency	:	1227.6 MHz
Pass band frequency	:	1217.60 - 1237.6 MHz
Insertion loss(over pass band)	:	2.5 dB (max)
Stop Band Attenuations		
@ $f_c \pm 50$ MHz	:	50 dB (min)
Return Loss (over pass band)	:	18 dB (min)
Connectors	:	SMA Type Female
Operating environment	:	-10 to + 55° C

MECHANICAL

Over all Dimensions	:	86.5 x 24 x 20 mm (3.4" X 0.94" X 0.78")
---------------------	---	--

Outline Drawing:

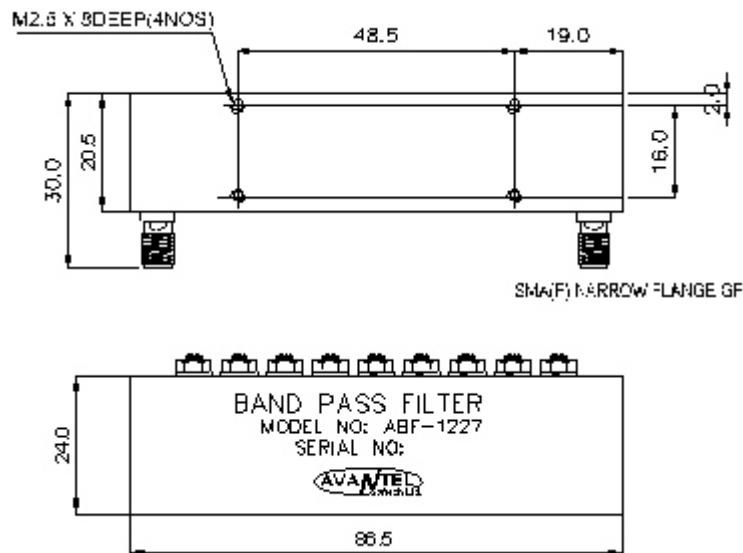

All dimensions are in millimeters