

Power Amplifier

Model No : APA 100 - 125

SPECIFICATIONS:

ELECTRICAL

Frequency Range	:	10 - 100 MHz
Power Output	:	125 W (Into 50 Ohms Load)
RF Input	:	0 dBm
Gain	:	51 dB
Gain Flatness	:	± 1 dB
Load VSWR	:	2.5:1
Input and Output Impedances	:	50 Ohms
Class of Operation	:	Class AB
DC Input	:	24 V
Current	:	12 A
Type of Input Signal	:	CW/AM/FM/WHITENOISE
Protections	:	Against high load mismatch, Against high temp., Against over drive.

MECHANICAL

Connector Type:		
Input	:	SMA Type Female
Output	:	N Type Female
Dimensions (l X b X h)	:	482.6 x 375 x 132.5 mm (19" X 14.7" X 5.21")
Weight	:	13 Kg (approx.) (28.6 lb)
Cooling	:	Forced Air Cooling

ENVIRONMENTAL

Operating Temp. Range	:	-10°C to + 55°C
Storage Temp. Range	:	-20°C to + 70°C
Humidity	:	95% RH Non Condensing


Avantel Limited

Power Amplifier


Model No : APA 100 - 125

Outline Drawing:

MODEL NO : APA 100-125

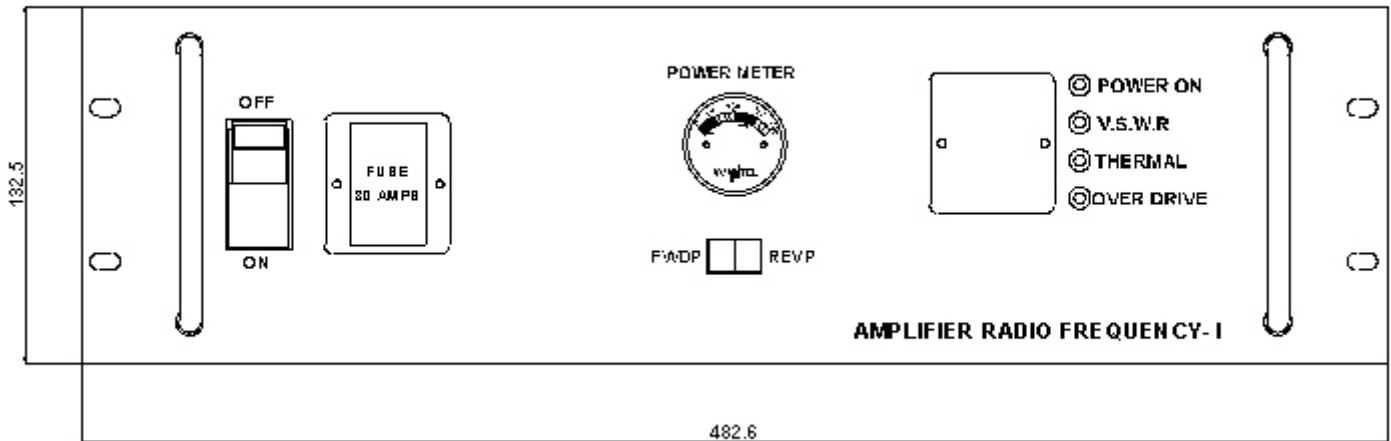

FRONT VIEW

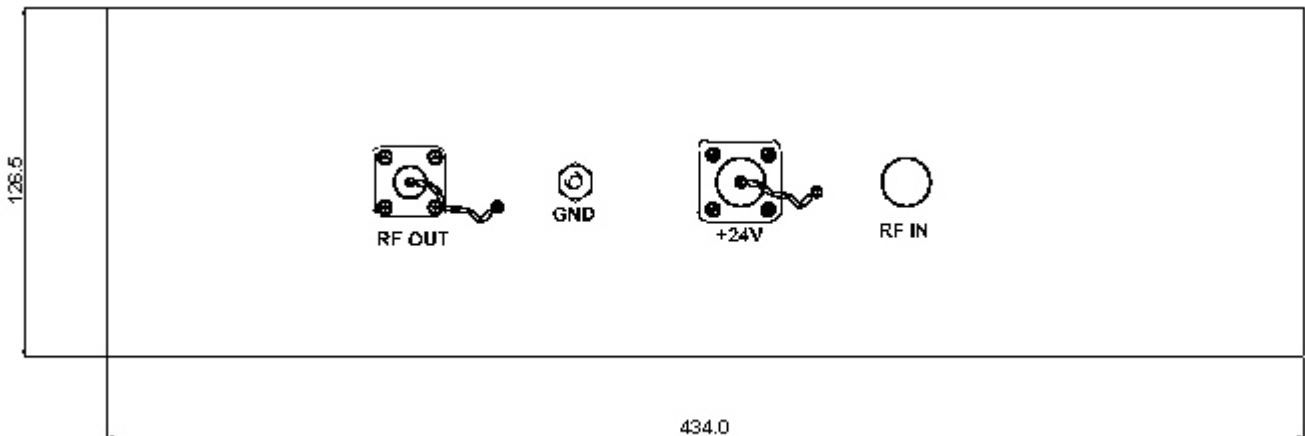

REAR VIEW

All dimensions are in millimeters

Avantel Limited