


SPECIFICATIONS:

ELECTRICAL

Frequency Range	:	20 - 100 MHz
Insertion Loss	:	3.5 dB (max)
VSWR	:	1.5:1 (max)
Isolation	:	15 dB (min)
Amplitude Imbalance	:	0.3 dB (max)
Phase Imbalance	:	±3° (max)
Power Handling	:	150 W

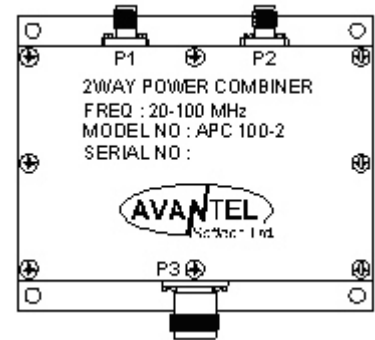


MECHANICAL

Over all dimensions	:	94 x 63 x 50 mm (3.7" X 2.48" X 1.96")
Input connector	:	SMA Type Female
Output connector	:	N Type Female
Weight	:	400 gm (max) (0.88 lb)
Finish	:	White / Yellow Chromatisation

ENVIRONMENTAL

Operating temperature	:	-10°c to + 60°c
Storage temperature	:	-20°c to + 70°c

Outline Drawing:

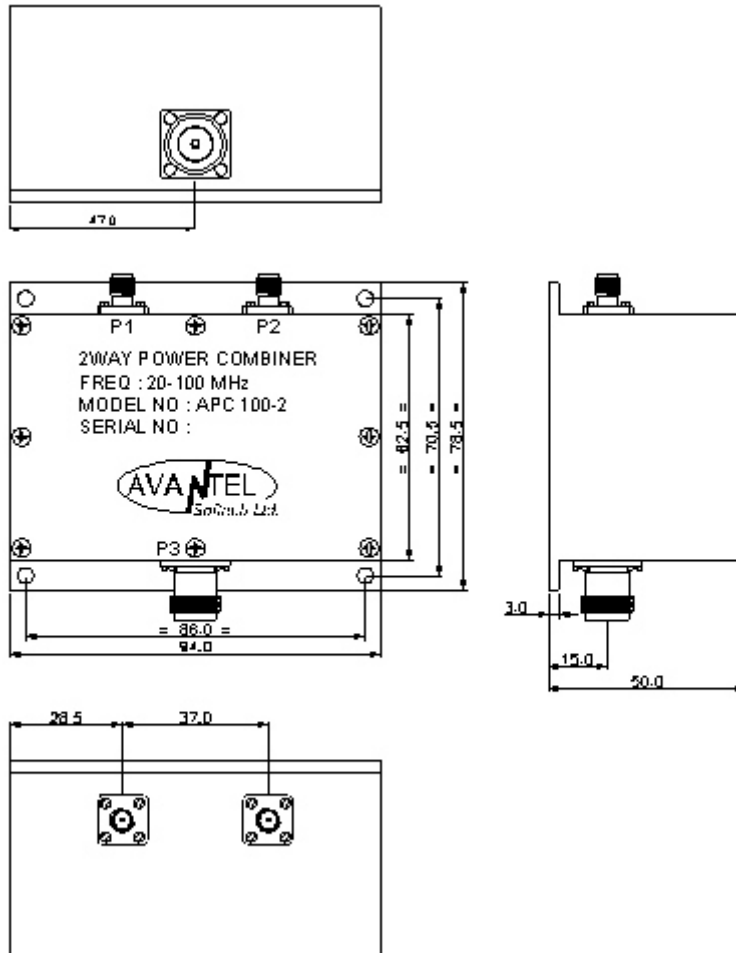

All dimensions are in millimeters