


## SPECIFICATIONS:

### ELECTRICAL

Frequency Range	:	2100 - 2400 MHz
Insertion Loss	:	3.5 dB (max)
VSWR	:	
Input	:	1.25:1 (max)
Output	:	1.25:1 (max)
Isolation	:	25 dB (min)
Amplitude Imbalance	:	0.3 dB (max)
Phase Imbalance	:	$\pm 2^\circ$ (max)
Power Handling	:	2 W

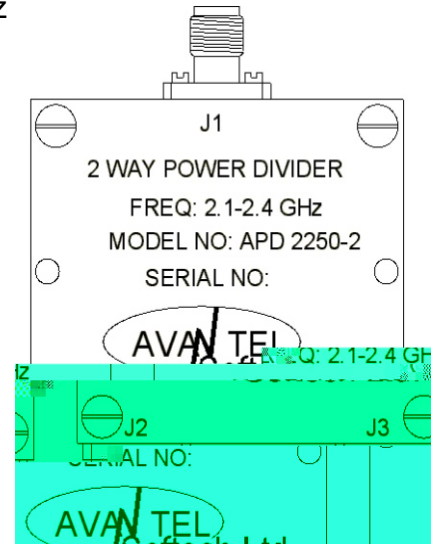

### MECHANICAL

Over all dimensions	:	39 X 44 X 20 mm (1.53" X 1.73" X 0.78")
Finish	:	White / Yellow Chromatisation
Connectors	:	
Input	:	SMA Type Female
Output	:	SMA Type Female


### ENVIRONMENTAL

Operating temperature	:	-10 <sup>0</sup> c to + 60 <sup>0</sup> c
Storage temperature	:	-20 <sup>0</sup> c to + 70 <sup>0</sup> c

# 2 - Way Power Divider

Model No : APD 2250 - 2

## Outline Drawing:

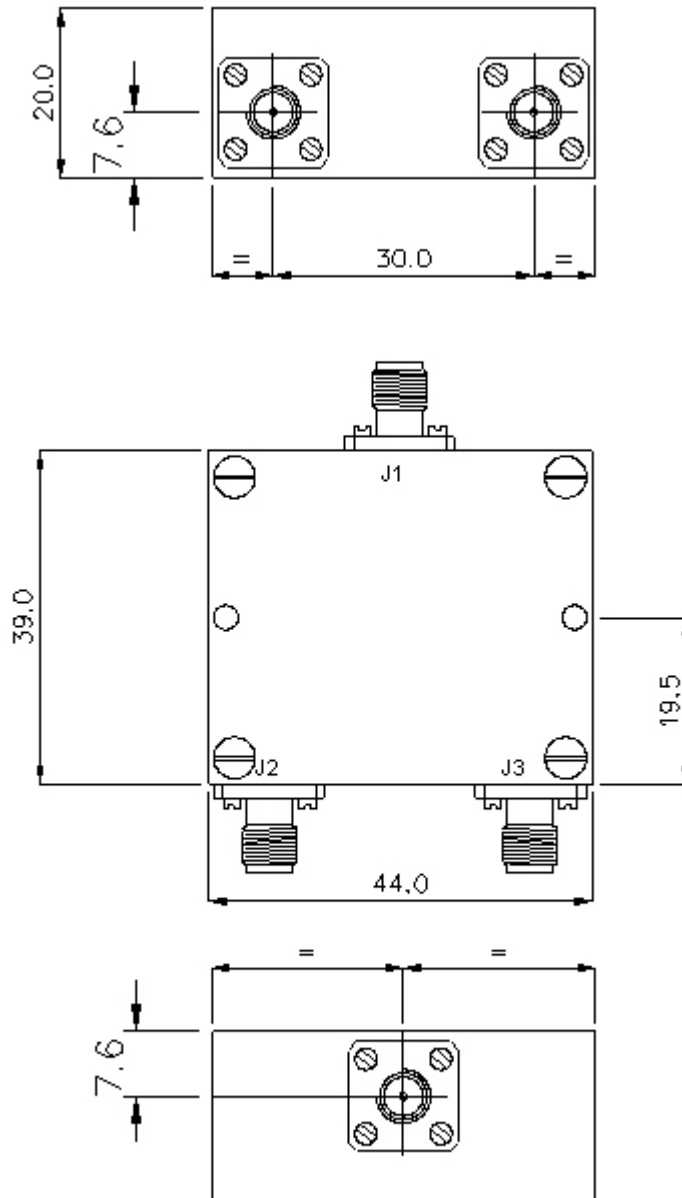

All dimensions are in millimeters

## Avantel Limited